



NON-CONTACT SPEED AND LENGTH MEASUREMENT

InteliSENS® SL i4 & SLR i4 Series



AUTOMATIC DIRECTION DETECTION

MEASURE DOWN TO ZERO SPEED

HIGH ACCURACY, NON-CONTACT, LASER DOPPLER MEASUREMENT

INTRODUCTION

- The IntelliSENS® SL i4 and SLR i4 Series directly replaces traditional, high-maintenance, problematic contact wheel and rollers type devices, with accurate “state-of-the-art” laser Doppler technology.
- Automatic **DIRECTION DETECTION**, and measurement down to **ZERO SPEED**, mean the SLR i4 gauge counts up, or counts down, so if your line reverses, final length measurement will still be accurate to 0.05%
- SL i4 and SLR i4 gauges are extremely easy to install, integrate and use. Production processes, such as wire, cable, web products, wovens, non-wovens, paper, plastic film, tapes, building material, floorings and labelling are all measured using the laser Doppler method.
- Accurate speed and length measurement reduces scrap, increases uptime and improves material yield, through elimination of product “Give Away” or “Short Length” claims.


NON-CONTACT MEASUREMENT

*- SLR model only




- **Zero Speed:** Measures Speeds Down to Zero*
- **Direction Detection:** Auto count Up or Down*
- **Accurate:** Better than 0.05%.
- **Repeatability:** Better than 0.02%
- **Non-Contact:** No Slippage, No Marking, No Wear
- **Industrial Design:** Harsh Factory Environment
- **Easy Integration:** Modern Communications
- **ReduceDowntime:** Permanently Calibrated
- **Reliable:** IntelliSENS® Technology 24/7
- **Excellent Value:** Low Cost of Ownership


MEASUREMENT MODES




Speed
Synchronisation




Elongation or
Speed Ratio




Part Length
Measurement




Cut-to-Length
Control




Encoder
Calibration




Speed
Measurement



Inkjet Print
Control



Speed
Balancing



Spool
Length

- Pipe ■ Tube ■ Paper ■ Foil ■ Film ■ Wire ■ Cable ■ Labelling
- Tapes ■ Packaging ■ Floor Coverings ■ Wovens ■ Non-Wovens
- Building Materials ■ Steel ■ Aluminium ■ Other metals

COMPARE

Contact

Laser Doppler

Contact Wheel / Encoder Counter	Non-Contact Doppler Measurement
Length & Speed Errors through slippage and wear, result in "Short Lengths" and "Give Away."	Zero Slip, Zero Wear. Exact Measurement.
Maintenance Costs, through calibration downtime and replacement parts.	No Moving Parts. Permanently Calibrated.
Marking and Damage to your product from contact wheels can cause Quality Rejections.	No Contact, No Damage, No Rejects.

CONNECT

Integration has never been easier.

Select from Standard Communications or choose from a wide range of factory fitted Optional Communications to meet your needs.

Connect to your existing indicator / display devices, PLC or PC.

Standard communications

(Selectable)



DISPLAY and RECORD

The SiDI Range of Display Interfaces are the perfect match for your IntelliSENS® SL i4 and SLR i4 Series Non-Contact Speed & Length gauge. From a simple LED display, fully featured VFD display, configure, diagnose and a large oversized LED display.



SiDI AiG1





SiDI CDi4



SiDI AiG3

Monitor and control the SLR i4 gauge on your PC or your mobile phone. Log measurements at the touch of a button.



PCIS software: interface, display and logging



PCIS on mobile phone via Bluetooth

TECHNOLOGY


Proton Products' expertise in Optical Design combined with the latest "Super Fast" Field Programmable Gate Array (FPGA) processors, Fast Fourier (FFT) and Auto-Correlation software techniques have created the IntelliSENS® SL i4 and SLR i4 Series of highly accurate, repeatable and dependable gauges.

LASER DOPPLER


PRINCIPLE OF OPERATION

- $d = \frac{\lambda}{2 \sin \kappa}$ • Fringe spacing is a function of laser wavelength and beam angle.
- $f \propto \frac{v}{d}$ • Doppler frequency is proportional to speed and inversely proportional to fringe spacing.
- $L = \int_0^T dt$ • Speed is integrated to measure length.


LASER BEAMS: SIDE VIEW

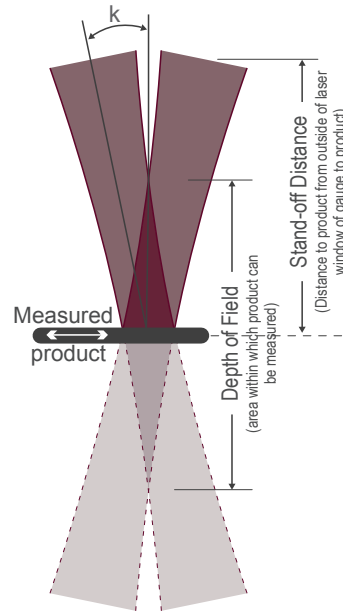

LASER DOPPLER PATTERN

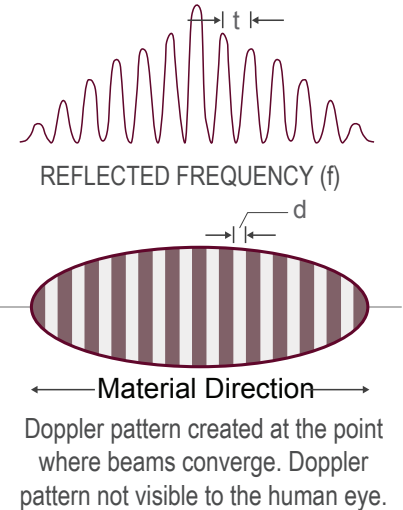

SUPER-FAST OUTPUTS



Measuring the speed and length of the product is one thing, but getting the information to your host system depends on the delivery of the data.

The IntelliSENS® SL i4 and SLR i4 Series delivers a maximum standard pulse output frequency of 1 MHz.

CALIBRATION & CERTIFICATION

Every gauge is factory calibrated on UKAS certified equipment. The gauges are then subjected to temperature cycling tests before final QC testing. Each gauge is supplied with a unique calibration certificate identified by the gauge serial number. Typical Factory Calibration Accuracy is between 0.02% and 0.05%.




LASER SAFETY

The SL i4 and SLR i4 Series contains a Class 3B laser diode and complies with EN60825-1:2001, and has the following safety measures in compliance with the Bureau of Radiological Health Class 3B:

- Interlock capability for remote shut-off: laser enable electrical contact
- Laser beam blocking device: mechanical shutter operated by switch on gauge case
- Delayed laser startup: LED indicator light on before laser reaches full power
- Laser indicator light
- Keyswitch to switch laser on and off

VISIBLE AND INVISIBLE
LASER RADIATION.
AVOID EXPOSURE TO BEAM
CLASS 3B LASER PRODUCT
Wavelength λ : 620 ~ 690 nm

SPECIFICATIONS: SLR i4

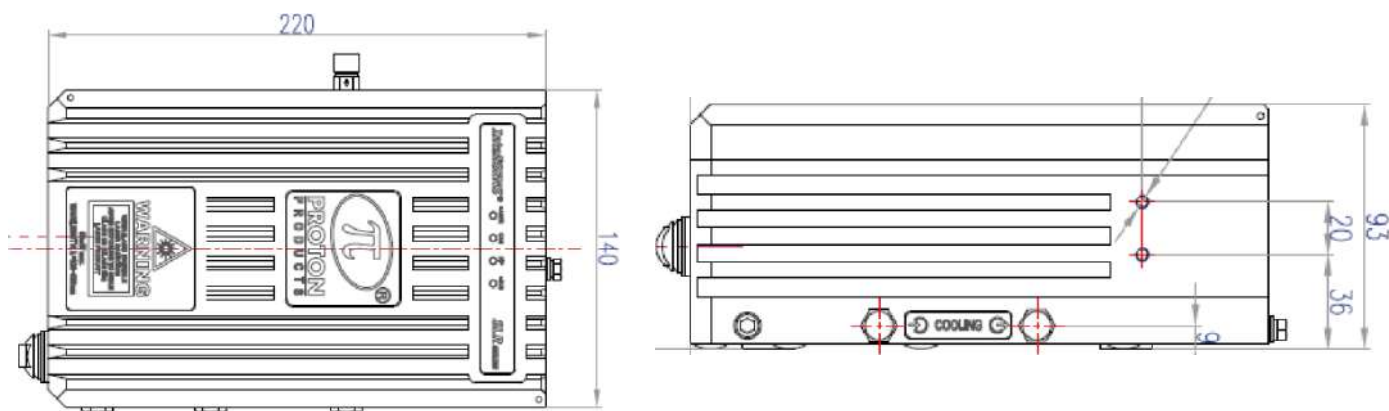

InteliSENS®	SLR1525 i4	SLR3060 i4	SLR6060 i4
Minimum Speed	0 (ZERO SPEED)	0 (ZERO SPEED)	0 (ZERO SPEED)
Maximum speed	+/- 2000m/min (6,562ft/min)	+/- 3000m/min (9843ft/min)	+/- 3000m/min (9843ft/min)
Stand Off Distance	150mm (5.91")	300mm (11.8")	600mm (23.6")
Depth of Field	25mm (0.98")	60mm (2.36")	60mm (2.36")



InteliSENS® SLR i4

Accuracy	Better than 0.05%
Repeatability	Better than 0.01%
Acceleration Rate	>500ms ²
Measurement Update Rate	Up to 25,000/s
Direction Detection	Automatic
Power Requirement	18 - 30 Vdc, 25 Watts
Protection Rating	IP67
Temperature Range	5° ~ 40°C (41° ~ 104°F)
Gauge Dimensions	LxWxH 220 x 140 x 93 mm (8.7" x 5.5" x 3.7")
Gauge Weight	3.5 kg (7.7 lbs)
Laser Spot Size	3mm (0.12") diameter
Units of Speed	m/min, ft/min
Units of Length	m, ft, yd
5x Digital Inputs	2 Fixed: Laser Enable, Optical Shutter Enable 3 Programmable: Reverse direction, Length hold, Display Hold, Speed Hold, Reset (length or reel number), End of reel. Max Input 24Vdc
3x Relay Outputs	Volt-Free Contact; Max. Voltage 50Vdc 0.5A Gauge OK, Gauge Measuring, Laser On, Laser at Temp, Shutter Open, (Status Indicators) Preset Length 1, Preset Length 2
Serial I/O	Selectable RS232, RS485, RS422: Speed, Length, GR, (Status Indicators).
CANBUS	Connects to Proton Products range of SiDI CDi4 Indicators. Can be used to supply power to gauge head.

InteliSENS® SLR i4 Series

Analogue Output	0 - 10Vdc Scaleable output. Output based on Speed or on Good Readings
3x Pulse Outputs	Opto-Isolated differential outputs. Configurable as Quadrature or Index. Default output 5V or user input to 24Vdc max. Max. Pulse Output up to 1MHz
Additional Protocols	DeviceNet, Modbus, Profibus, ProfiNet, EtherNet, Industrial Protocol, and SSI

SPECIFICATIONS: SL i4

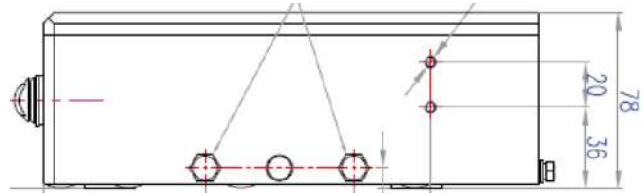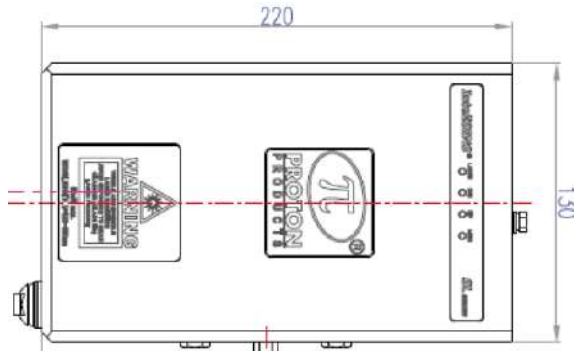

IntelisENS®	SL1525 i4	SL3060 i4	SL6060 i4
Minimum Speed	0.1m/min (0.3ft/min)	0.2m/min (0.6ft/min)	0.2m/min (0.6ft/min)
Maximum speed	+/- 2000m/min (6,562ft/min)	+/- 3000m/min (9843ft/min)	+/- 3000m/min (9843ft/min)
Stand Off Distance	150mm (5.91")	300mm (11.8")	600mm (23.6")
Depth of Field	25mm (0.98")	60mm (2.36")	60mm (2.36")

IntelisENS® SL i4	
Accuracy	Better than 0.05%
Repeatability	Better than 0.01%
Acceleration Rate	>500ms ²
Measurement Update Rate	Up to 25,000/s
Direction Detection	Automatic
Power Requirement	18 - 30 Vdc, 20 Watts
Protection Rating	IP67
Temperature Range	5° ~ 40°C (41° ~ 104°F)
Gauge Dimensions	LxWxH 220 x 130 x 78 mm (8.7" x 5.1" x 3.1")
Gauge Weight	3.5 kg (7.7 lbs)
Laser Spot Size	3mm (0.12") diameter
Units of Speed	m/min, ft/min
Units of Length	m, ft, yd
5x Digital Inputs	2 Fixed: Laser Enable, Optical Shutter Enable 3 Programmable: Reverse direction, Length hold, Display Hold, Speed Hold, Reset (length or reel number), End of reel. Max Input 24Vdc
3x Relay Outputs	Volt-Free Contact; Max. Voltage 50Vdc 0.5A Gauge OK, Gauge Measuring, Laser On, Laser at Temp, Shutter Open, (Status Indicators) Preset Length 1, Preset Length 2
Serial I/O	Selectable RS232, RS485, RS422: Speed, Length, GR, (Status Indicators).
CANBUS	Connects to Proton Products range of SiDI CDi4 Indicators. Can be used to supply power to gauge head.

IntelisENS® SL Series	
Analogue Output	0 - 10Vdc Scaleable output. Output based on Speed or on Good Readings
3x Pulse Outputs	Opto-Isolated differential outputs. Configurable as Quadrature or Index. Default output 5V or user input to 24Vdc max. Max. Pulse Output up to 1MHz
Additional Protocols	DeviceNet, Modbus, Profibus, ProfiNet, EtherNet, Industrial Protocol, and SSI

CONTACT

USA

Proton Products Inc.
9272 Jeronimo Rd #110
Irvine, CA 92618.
United States
Email : Sales@protonproducts.us

EUROPE

Proton Products Europe N.V.
TerspeltBusinessPark
Koeweideblock 2/C13
B-1785 Merchterm
BELGIUM.
Email : sales@protonproducts.eu

ASIA

Proton Products Chengdu Ltd.
No. 111, Checheng West 2nd Road,
Longquanyi District, Chengdu,
Sichuan Province 610100,
CHINA.
Email : sales@protonproducts.cn

Thailand Agent

Diamond International Co., Ltd.
555/46 Moo 4, Mahasawat,
Bangkrui, Nonthaburi 11130,
THAILAND.
Mr. Kamnat Chanyanimit
Tel : +66 2038 7144
Mobile : +66 8 9936 6895
Email : sales@diamond-inter.com